PET アルミ蒸着フィルム

印刷ラベル

UL・cUL
PGDQ2 / 8 : MH15572

ラミネートあり
強粘着

TAK-10LUC

Pressure-sensitive printed labels

Application Surface	Max Temp (°C)	Min Temp (°C)	Indoor Use	Outdoor Use
Aluminum, Anodized aluminum, Aluminum die-cast	80	-40	Dry	No
Stainless steel	80	-40	Dry	No
Epoxy paint	80	-40	Dry	No
Epoxy powder paint	80	-40	Dry	No
Acrylonitrile butadiene styrene	80	-40	Dry	No
Epoxy	80	-40	Dry	No
Polycarbonate	80	-40	Dry	No
Polyethylene	80	-40	Dry	No
Canadian Application Surface	Max Temp (°C)	Min Temp (°C)	Indoor Use	Outdoor Use
Metals - bare, plated, painted or enameled steel or aluminum	80	-40	Dry	No
Powder coated metal Group C - epoxy powder coat paint	80	-40	Dry	No
Plastic Group III - polycarbonate, acetate, acrylic	80	-40	Dry	No
Plastic Group VI - polystyrene, styrene acrylonitrile, acrylonitrile-butadiene-styrene	80	-40	Dry	No
Plastic Group VIII - Unsaturated (thermoset) polyester (fiberglass), epoxy plastic, polyethylene terephthalate, polybutylene terephthalate	80	-40	Dry	No

* Dry - Use limited to indoor dry locations.

Report Date: 2015/12/11
Last Revised: 2015/12/12

ラベル構造図

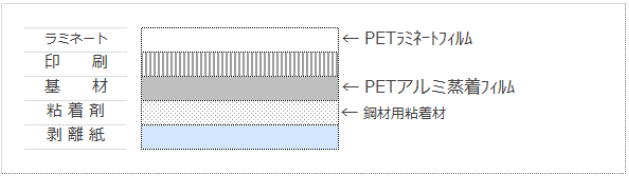

アルミPETアルミ蒸着粘着フィルム。
つや消し、白コートの素材があります。
粘着剤がアクリル系白色強粘着剤です。初期接着も強い。
ラミネートあり。
印刷は、シール印刷が認証を受けています。

UL規格とcUL規格の両方に対応できるカタログNo.となっています。

認定材料（基材）
- PET25Sﾏｯﾄ　鋼材（銀ケシ）
- PET25S白ｺｰﾄ　鋼材（銀ケシ）

認定ラミネート
- PET16, 25, 50, ﾌﾞｸﾘｱ16, 25, 50（透明ラミネート）
- PETNﾏｯﾄ25（ケミカルマット透明ラミネート）
- PETSﾏｯﾄ25（サンドマット透明ラミネート）
- PET25Fﾏｯﾄ（セミグロス透明ラミネート）
- PP25ﾏｯﾄ（PPマットラミネート）

印刷方式と色の制限	Indoor use	Outdoor use
シール印刷	制限なし	使用不可

関連UL規格　カタログNo.（同素材基材などの仕様のUL規格）
- PGDQ8：TAK-10LUC
- PGJI2：TAK-10PLTUC
- PGJI8：TAK-10PLTUC

©2017 TAK PRINTING Co., LTD. , All Rights Reserved.